

The image shows two police officers in full tactical gear, including helmets with clear visors and balaclavas. They are holding HK 40mm submachine guns. The officer on the left has a vest with 'POLIZEI' written on it. The officer on the right is holding a submachine gun with a red dot sight. The background is a plain, light-colored wall. A semi-transparent black box with white text is overlaid in the center of the image.

40 MM SYSTEMS


The HK logo, consisting of the letters 'HK' in a stylized, red, blocky font, is positioned at the bottom center of the image.

HK

AG36/AG36 A1

THE 40 MM X 46 AG36 ADD-ON GRENADE LAUNCHER HAS BEEN DESIGNED SPECIFICALLY FOR USE ON THE G36/G36K.

THIS COMBINATION GIVES THE USER ADDED EFFECTIVENESS AGAINST UNARMED OR LIGHTLY ARMED AREA AND POINT TARGETS AT RANGES UP TO 350 M (DEPENDENT ON THE AMMUNITION). THE AG36 FIRES 40 MM X 46 (LOW VELOCITY) GRENADES OF ANY LENGTH – INCLUDING HE ROUNDS, IMPULSE ROUNDS, CS GAS ROUNDS, SMOKE GRENADES AND OTHER TYPE NON-LETHAL AMMUNITION. ALL OF THE GRENADES FOR THE AMERICAN M203 AND MM1 GRENADE LAUNCHERS CAN ALSO BE USED.

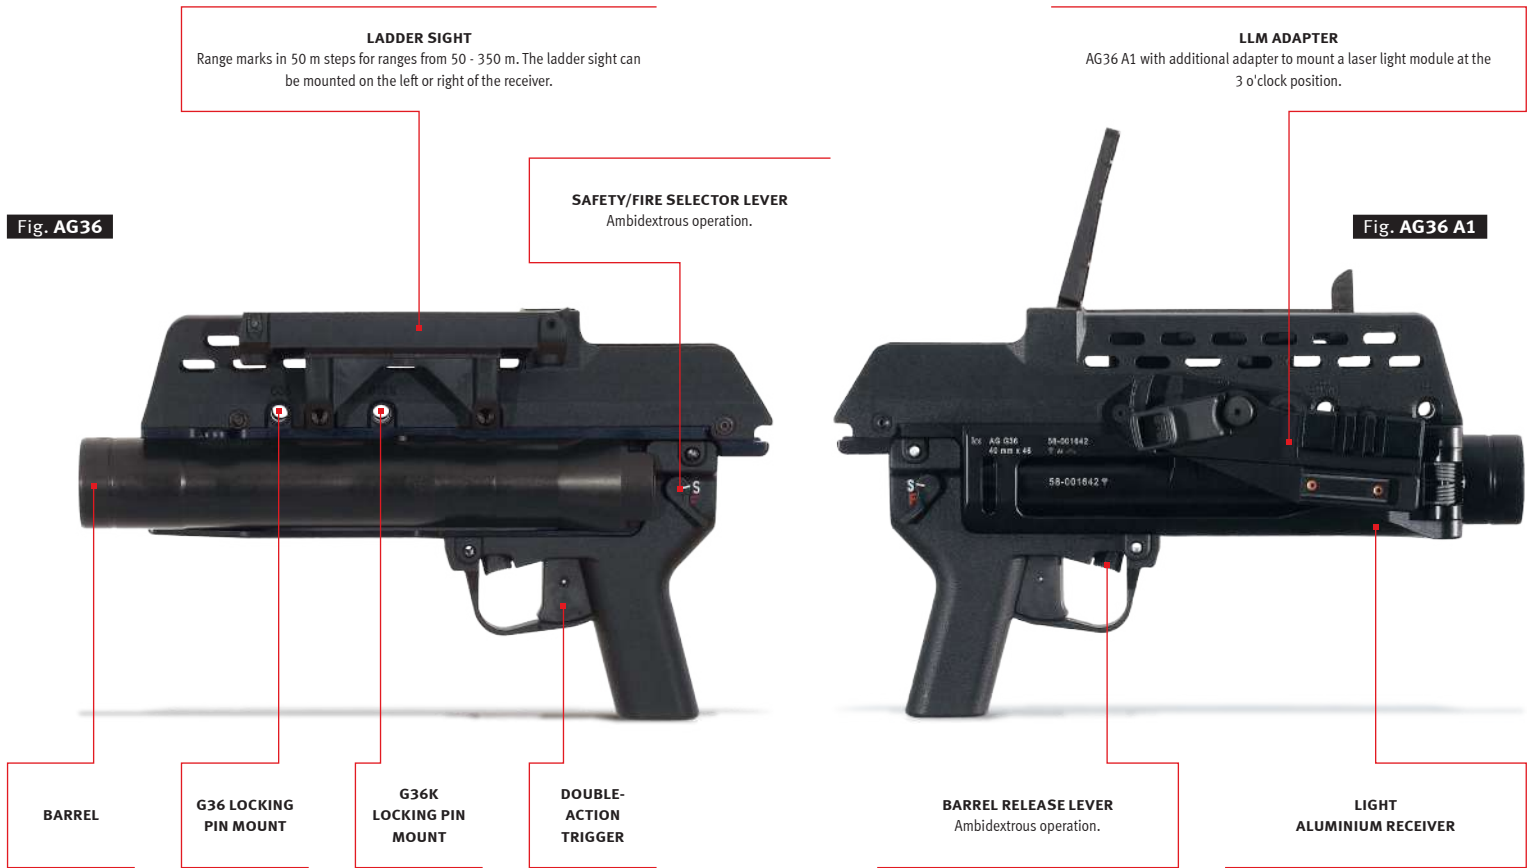

AG36 AS STAND-ALONE WEAPON

Regardless of any primary weapon with separately available buttstock element featuring G36 buttstock interface.



GLM

THE GLM 40 MM ADD-ON GRENADE LAUNCHER DEMONSTRATES THE SAME FUNCTIONS, CHARACTERISTICS AND HANDLING AS THE AG36. DEVELOPED FOR USE ON THE HK416/HK417, IT CAN ALSO BE MOUNTED ON M4/M16 OR C7/C8 TYPE ASSAULT RIFLES BY MEANS OF A SPECIAL ADAPTER. AS A SCALABLE SYSTEM, THROUGH THE USE OF OPTIONAL ACCESSORY COMPONENTS THE GLM CAN ALSO BE CARRIED AS A STAND-ALONE WEAPON INDEPENDENTLY OF ANY PRIMARY WEAPON.

Fig. GLM

Colour:  Black  RAL8000



MIL-STD-1913 PICATINNY RAIL
The Picatinny rail is fixed directly to the receiver of the GLM.

GLM ADAPTER
For fixing on an assault rifle. Optional adapters are available, e.g. for the M4/M16.

BUTTSTOCK RELEASE LEVER
Serves as a locking device when a buttstock is used.



BUTTSTOCK

Adjustable with various locking positions. Available as an accessory. Additional buttstock variants on request.

EYE FOR CARRYING SLING



LADDER SIGHT

Range marks in 50 m steps for ranges from 50 - 350 m. The ladder sight can be mounted on the left or right of the receiver.

Fig. GLM as stand-alone weapon




DOUBLE-ACTION TRIGGER

FORWARD GRIP
Folding, with integrated finger protector. Available as an accessory.

SAFETY/FIRE SELECTOR LEVER
Ambidextrous operation.

BARREL RELEASE
Ambidextrous operation.

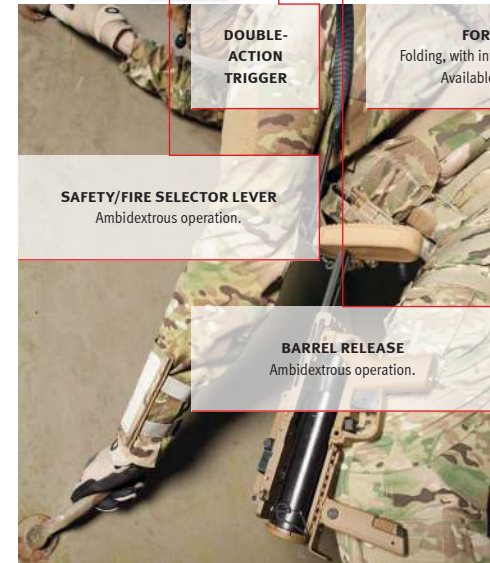

HK169

THE HK169 IN CALIBRE 40 MM X 46 (LOW VELOCITY) IS THE CUTTING-EDGE, SUCCESSOR DEVELOPMENT OF THE HK69 GRENADE LAUNCHER, WHICH HAS BEEN AVAILABLE SINCE THE MID-1970S. AS A SINGLE-SHOT WEAPON WITH A BREECH-LOADING, BREAK-ACTION, RIFLED BARREL AND G36 BUTTSTOCK INTERFACE, IT IS BASED ON THE DESIGN OF THE HK AG36 AND GLM/M320 ADD-ON GRENADE LAUNCHERS. THE HK169 WITH AN EFFECTIVE RANGE OF APPROXIMATELY 350 METRES IS SUITABLE FOR HE ROUNDS, EXPLOSIVE FRAGMENTATION ROUNDS, HOLLOW CHARGE ROUNDS AND CONTACT ROUNDS, BUT ALSO NON-LETHAL AMMUNITION, SUCH AS IMPULSE ROUNDS AND ROUNDS CONTAINING IRRITANTS. IN MILITARY DEPLOYMENT, THE HK169 IS USED TO COMBAT INDIVIDUAL AND GROUP TARGETS (ALSO PROTECTED TARGETS) OR LIGHTLY ARMoured VEHICLES. POLICE FORCES USE THE HK169 AS A NON-LETHAL WEAPON, E.G. IN THE EVENT OF VIOLENT UNREST.

BUTTSTOCK INTERFACE
For use with G36 buttstocks.

CARRYING SLING EYE

BARREL RELEASE
Ambidextrous operation.



Fig. HK169

FORWARD GRIP
Can be folded down.

SAFETY/FIRE SELECTOR LEVER
Ambidextrous operation.

TELESCOPIC BUTTSTOCK



Fig. HK169 K
with special accessories

TACTICAL BUTTSTOCK (OPTIONAL)
Developed for deployment with ballistic protective helmet. Adjustable in length, folding and locks independently. With removable cheek rest.

DOUBLE-ACTION TRIGGER

FINGER PROTECTOR



MIL-STD-1913 PICATINNY RAIL
Picatinny rail integrated to the receiver at the 12 o'clock position.



Fold the buttstock to save space and carry the HK169, e.g. in a rucksack.

HK269

THE HK269 IS AN ENHANCED DEVELOPMENT OF THE GLM/M320 IN CALIBRE 40 MM X 46 (LOW VELOCITY) WITH THE OPTION TO UNLOCK THE BARREL EITHER TOWARDS THE LEFT OR RIGHT. THE INTERFACES TO MOUNT IT ON ASSAULT RIFLES AND THE OPTION TO USE IT AS A STAND-ALONE WEAPON REMAIN UNCHANGED. APPLICATION RANGE OF UP TO 350 METRES. THE HK269 IS SUITABLE FOR BOTH LETHAL AND NON-LETHAL AMMUNITION.



BREAK-ACTION BARREL

The barrel can be unlocked either towards the left or right. No tools required for the conversion. After having removed the barrel, the barrel and the spring are turned by 180° and refitted.

UNIVERSAL INTERFACE

The universal interface enables use of the HK269 with AR-10/AR-15 rifles with Picatinny/STANAG 4694 handguard profile.

Fig. HK269



BUTTSTOCK WITH SLING SWIVEL
Fits GLM/M320.














Colour:  Black  RAL8000



HK417 A2 and HK416 A5 each with adapted HK269

AG36/GLM/HK269

EXPLOITING
SYNERGIES.

			
	AG36 GLM ¹ HK269 ¹	GLM HK269	GLM ² HK269 ²
 G36	✓ ✓ ✓	✓ ✓	✓ ✓
 G36K	✓ ✓ ✓	✓ ✓	✓ ✓
 G36C	- - -	✓ ✓	✓ ✓
 HK416 – 11"		✓ ✓	✓ ✓
 HK416 – 14.5"		✓ ✓	✓ ✓
 HK416 – 16.5"		✓ ✓	✓ ✓
 HK416 – 20"		✓ ✓	✓ ✓
 HK417 – 13"		✓ ✓	¹ Can be used in connection with the modular G36 aluminium handguard and keyhole interfaces only. ² Can be used in connection with the respective, genuine HK adapter kit only.
 HK417 – 16.5"		✓ ✓	
 HK417 – 20"		✓ ✓	



TECHNICAL DATA

	Calibre	Round feed	Modes of fire	Trigger pull (in N, approx.)	Muzzle velocity ¹ (in m/s, approx.)	Sight ²	DIMENSIONS			WEIGHT			Operating principle
							Length min./max. (in mm, approx.)	Height/width (in mm, approx.)	Barrel length/ sight radius (in mm, approx.)	Weapon (in kg, approx.)	Buttstock (in kg, approx.)	Sights (in kg, approx.)	
AG36	40 mm x 46	Manual	0-1	60	75	LV	354/-	211/78	280/148	1.50	-	0.13	Single loader with breach-loading, break-action barrel
AG36 A1	40 mm x 46	Manual	0-1	60	75	LV	354/-	211/120	280/148	1.50	-	0.13	
GLM	40 mm x 46	Manual	0-1	60	75	LV	285/-	210/99	215/148	1.27	-	0.13	
(SAM) GLM	40 mm x 46	Manual	0-1	60	75	LV	434/518	210/99	215/148	1.27	0.80	0.13	
HK169	40 mm x 46	Manual	0-1	60	75	M	395/665	201/72	280/233	2.00	0.41	0.08	
HK169 K	40 mm x 46	Manual	0-1	60	75	M	330/600	201/72	224/242	1.70	0.41	0.08	
HK269	40 mm x 46	Manual	0-1	60	75	LV	285/-	210/99	215/148	1.27	0.80	0.13	

¹ Depends on the ammunition | ² Various sights can be mounted, LV = ladder sight, M = iron sight